




GP Autolift

GP 201 Top Line T8

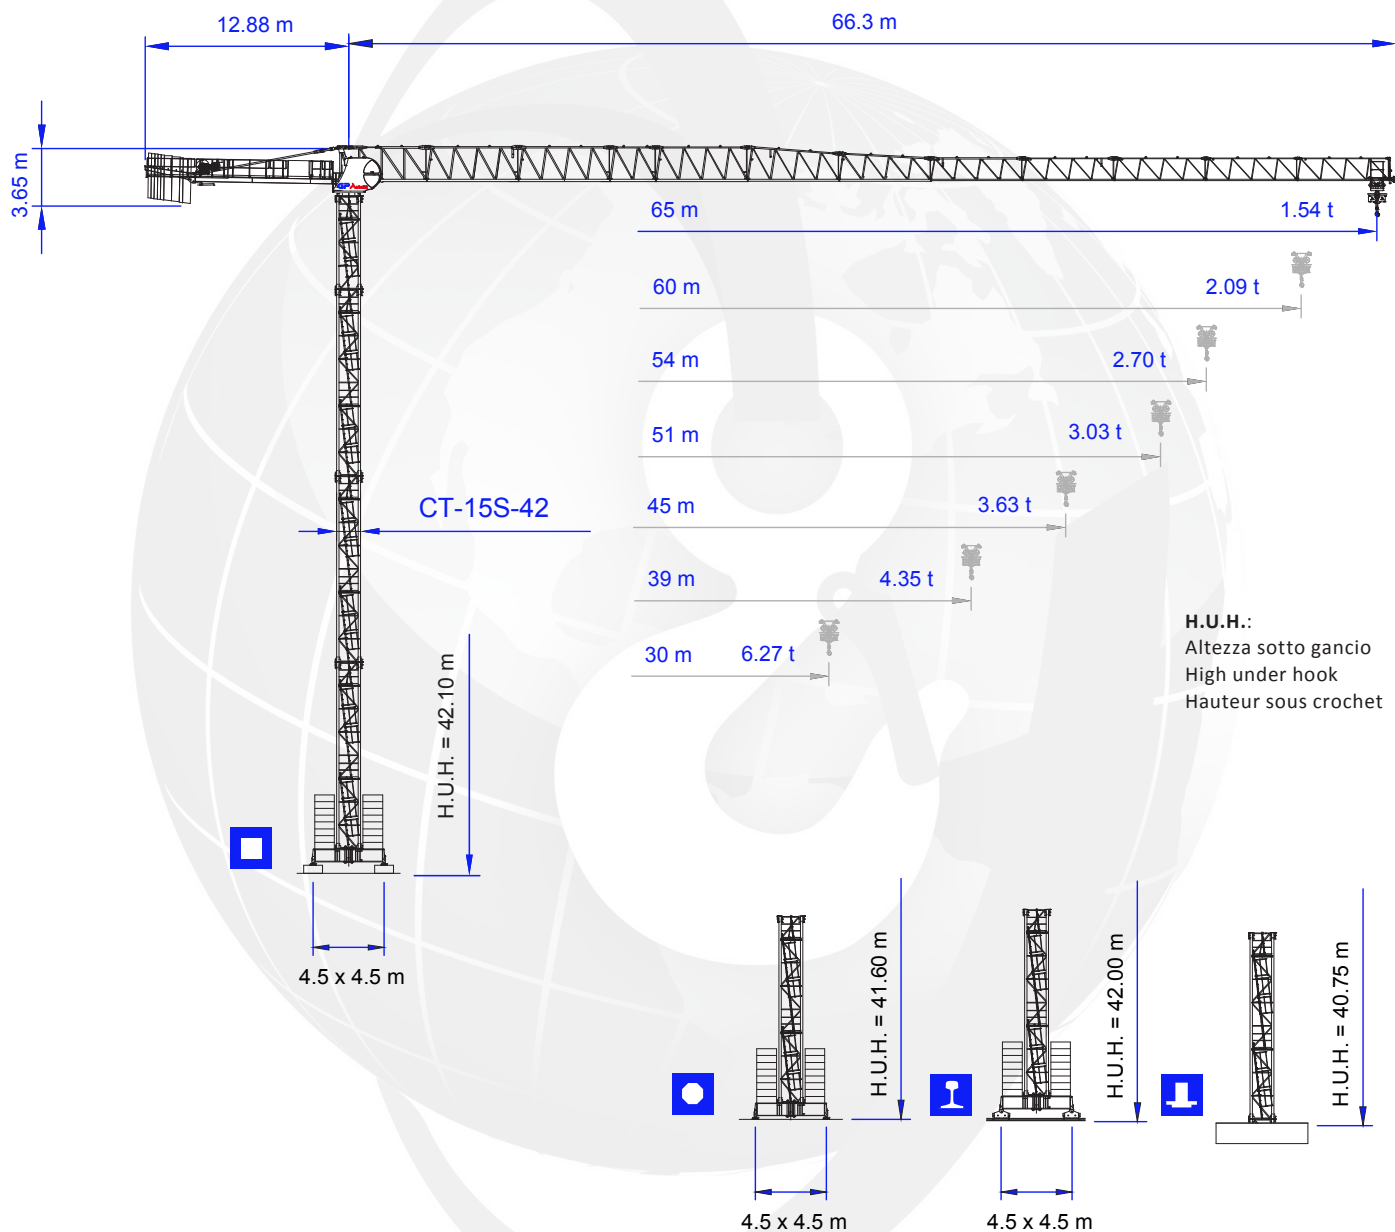

REALIZZAZIONE, PROGETTAZIONE E DEPOSITO DI PROPRIETÀ DELLA GP AUTOLIFT SRL
RÉALISATION ET LA CONCEPTION DE LA PROPRIÉTÉ DÉPOSÉE PAR GP AUTOLIFT SRL
REALIZATION AND DESIGN BY GP AUTOLIFT SRL INTELLECTUAL PROPERTY

PROGETTO E DESIGN A CURA DI INGEGNER EMANUELE GREPPI
PROJECT AND DESIGN BY EMANUELE GREPPI
ARCHITECTE INGÉNIEUR CHEF M. EMANUELE GREPPI

Jib 8T [m]	Diagramma di portata • load diagrams • diagramme de charge • Kaldırma Kapasitesi диаграмма грузоподъемности												
	15,3	16,2	18,0	19,3	20,0	20,9	21,5	21,7	22,4	22,5	22,9	23,5	22,9
28	4037	4320	4881	5290	5520	5790	5987	6022	6247	6298	6405	6600	6766
30	3727	3991	4516	4895	5108	5360	5544	5577	5786	5833	5934	6115	6270
33	3335	3574	4048	4394	4588	4816	4983	5012	5202	5245	5336	5500	
36	3009	3228	3662	3978	4155	4364	4517	4544	4718	4757	4840		
39	2735	2937	3336	3628	3791	3983	4124	4149	4309	4345			
42	2500	2687	3058	3328	3480	3658	3788	3812	3960				
45	2297	2472	2817	3069	3210	3377	3498	3520					
48	2121	2284	2607	2843	2975	3131	3245						
51	1965	2118	2422	2644	2769	2915							
54	1826	1971	2258	2468	2585								
57	1703	1840	2112	2310									
60	1524	1722	1980										
62	1524	1650											
65	1430												

II Ropes



+ 100 Kg

AUTOLIFT Senza il sistema Autolift tutte le portate intermedie diminuiscono il carico del 10% / All intermediate loads are decreased of 10% if the crane is not equipped with Autolift control / Les charges intermédiaires sont diminuées de 10% si la grue n'est pas équipée d'un contrôle Autolift / Eğer kreyin Autolift sistemi ile donatılmamışsa, bütün orta seviye yüklemelerde kapasite %10 azalır. - (Autolift, GPA tarafından opsiyonel olarak sunulmaktadır) / без Autolift промежуточной уменьшается на 10% нагрузки.

Meccanismi • Mechanisms • Mécanismes • Mekanizmalar • механизмы							
[kW]			[kg]	[m/min]	[kg]	[m/min]	
	40 HP - 30 kW fune ϕ 12mm LEBUS Fune 450m	1	8000	3,5	4000	7	
		2	8000	10	4000	20	
		3	8000	19,5	4000	39	
		4	6000	29	3000	58	
		5	3000	42	1500	84	
		5*	1000	47	500	94	
	50 HP - 37 kW fune ϕ 12mm LEBUS Fune 670m	1	8000	4,0	4000	8	
		2	8000	13	4000	25	
		3	8000	21	4000	42	
		4	6000	38	2870	75	
		5	4000	50	1500	100	
		5*	1000	58	1000	116	
	60 HP - 45 kW fune ϕ 12mm LEBUS Fune 570m	1	8000	5,5	4000	11	
		2	8000	13	4000	26	
		3	8000	24	4000	48	
		4	5700	46	2870	92	
		5	3000	65	1500	130	
		5*	1600	75	800	150	
			m/min	5.5 kW	* velocità regolata automaticamente da sensore di corrente / speed automatically controlled by a current sensor / vitesse réglée automatiquement par capteur de courant / Hız sensörleri tarafından otomatik olarak kontrol edilir / скорость автоматически регулируется датчиком тока		
			rpm	n. 2 x 4.0 kW			
	19		m/min	n. 2 x 3.0 kW			
Assorbimenti / Power consumption / Puissance électrique /Enerji / поглощения				Kw	40HP	50HP	60HP
					35	40	47



GP Autolift

Gru, Progetti e Automazioni per il sollevamento - Cranes, Projects and lifts' automations

Sede Legale: Via Melchiorre Gioia, 8 - 20124 Milano

Sede operativa: via U. Giordano, 1/13 - 21017 Samarate (VA) - Tel. +39 0331 1820275 - Fax +39 0331 1820276 • info@gpautolift.com
www.gpautolift.com